

High Pressure Pump



KATO High-Pressure Pump Model : KP-203(2")

It is Light Weight, Economical and User Friendly. They are great for Multi-Task Dewatering Projects in Agricultural, Construction, and also home use.

3-way output Port can be used independently or simultaneously depending on the application.

Applications:

- Irrigation
- Tank Filling
- Firefighting
- Spraying
- High Head Water Transfer
- Jetting & Cleaning
- Sprinklering

Features & Benefits :

- Three Way Discharge.
- Powder Coated High Grade Aluminium Casing.
- Balanced Impeller designed to extend engine life.
- Impeller Design provides the versatility of high flow rates with strong pressure
- Allows for rapid priming of pump casing.
- Easy maintenance
- Light Weight

Specification


Pump	
Model	KP-203
Inlet size	2"
Outlet size	Two 1" & One 1½"
Impeller	Single stage
Capacity	400 l/min
Max total head	75 m
Max suction lift	7 m
Required Power @3600 rpm	5.5-6.5 hp

KATO

Installation & Priming

- Fit strainer to suction pipe end, a foot valve is not required.
- To prime, fill pump body with water then allow pump to run until drawing water.

Performance Gurves

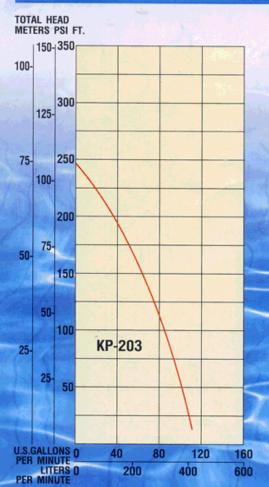



KP-203 : Robin Engine EX17

KP-203: Honda Engine GX200

1



Coupling set



Hose clamp



Strainer