

TROUBLE

**MAXIMUM 75%
LOAD FACTOR**

**PUMP HEAD
OVERHEATS**

**CARBON DEPOSIT
IN VALVES**

VERY NOISY

LOW EFFICIENCY


**CANNOT RUN
FOR LONG HOURS**

POWER WASTAGE

**PISTON
SEIZURE**

OIL LEAKAGE

**POWER SURGE ON
FREQUENT RESTARTS**

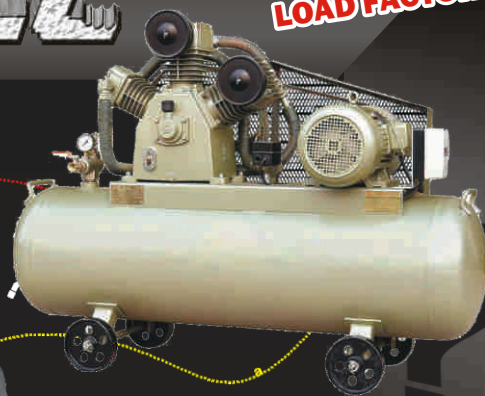


Comparison of screw air compressor & piston air compressor

Compressor type	Screw (10 HP)	Piston (10 HP)
Free Air Delivery	1100L/MIN	1151L/MIN
MAX. available F.A.D	1100L/MIN (100%)	863L/MIN (75%)
Cooling Method	Oil cooled	Air cooled
Discharge Air Temperature	80°C	110°C
Max. Daily Operation	24hours	12hours(Recommended)
Noise Level	68dB(A)	82dB(A)
Lube Oil Replacement	Every 2000hours	Every 500hours
After-cooler	Yes. Can remove 50% moisture	Not Equipped
Oil Filter Price	RM88(replace every 2000hours)	NO
Maintenance	1. Yearly maintenance cost:RM2000 2. Main maintenance period: about 24000hours 3. Only need to change the bearing & oil seal	1. Yearly maintenance cost:RM2500 2. Main maintenance period: about 8000hours 3. need to change valve set, piston ring, bearing, oil seal, connecting rod, piston pin, etc.



SAY GOODBYE to your
TROUBLESOME piston air compressor

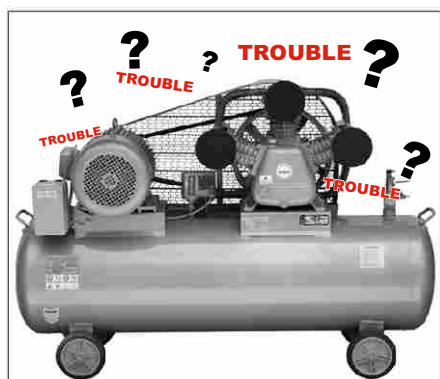

CHANGE NOW!!



**USE IT NOW!!!
SAVE NOW!!!**

OLYMTECH Show You the Way Into “Silent Screw Air Compressor” Era!

Technical Specifications (Belt Drive)

Model	Max Working Pressure		CAPACITY F.A.D		Motor Power		Connection	Net Weight	Dimension (L*W*H)
	bar	psig	m ³ /min	CFM	hp	kw	inch	kgs	mm
OL7.5CB-8	8	116	1.1	39	10	7.5	G1/2"	220	850*600*850
OL7.5CB-10	10	145	1	35					
OL7.5CB-13	12.5	182	0.8	28					
OL11CB-8	8	116	1.7	60	15	11	G3/4"	280	850*600*950
OL11CB-10	10	145	1.5	53					
OL11CB-13	12.5	182	1.3	46					
OL15-7	7	102	2.5	88	20	15	G1"	380	950*870*1230
OL15-8	8	116	2.4	85					
OL15-10	10	145	2.1	74					
OL15-13	12.5	182	1.8	64					

 **Olymtech**[®]
 SCREW AIR COMPRESSOR
 (Belt Drive)

- ◆ According to the standard of GB19153-2009.
- ◆ Compressor Stage: Single Stage.
- ◆ Power Supply: 415V/50HZ/3PH.
- ◆ Exhaust Temperature: Ambient Temperature + 10 °C.
- ◆ Starter: 10HP&15HP: DOL start, 20HP: Y-△ Start.
- ◆ Please contact us for any specification that is not within the above mentioned standard.

CHANGE NOW!!
USE IT NOW!!!
SAVE NOW!!!

