

RMC 2-STAGE IMPELLER CENTRIFUGAL PUMP


The RMC Series with two back to back impellers. It is used for high head values and large capacity. These pumps should be installed in a covered area, protected against weather.

Applications:

- Fire fighting (Jockey, Hose Reel)
- Pressure booster
- Boiler feeding and loading
- Pumping clean water and non-aggressive liquid



Materials:

- Pump body: Cast iron
- Insulation class: Class F
- Duty: Continuous rated
- Motor: Closed, externally ventilated
- Protection class: IP44
- Mechanical seal: Carbon / Ceramic

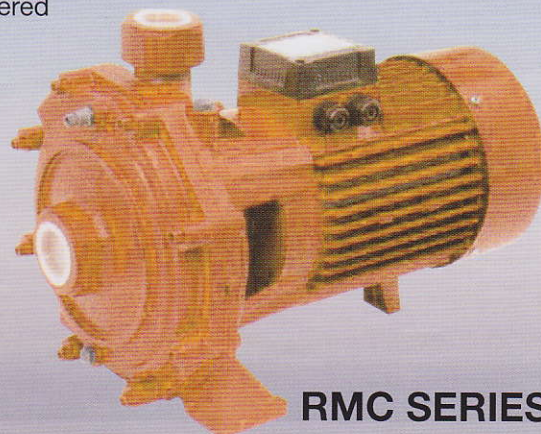


RMC SERIES

No.	Model	Motor Power		Rated Current Ampere (50Hz) 3-Ph 415V	Speed (rpm)	Max. Capacity (L/min)	Max. Head (m)	Suction Head (m)	Overall Dimension LXWXH (mm)	Net Weight (kg)
		kw	hp							
1	RMC25/120	0.55	0.75	1.63	2850	80	32	9	380x210x240	16.2
2	RMC25/130	0.75	1.0	1.8	2850	82	42	9	380x210x240	18.8
3	RMC25/140H	1.1	1.5	2.7	2850	120	52	9	415x255x320	23.5
4	RMC25/160B	1.5	2	3.5	2850	140	60	9	415x255x320	24.5
5	RMC25/160A	2.2	3	5	2850	180	68	9	480x290x350	31
6	RMC32/200C	3	4	7.2	2850	250	71	9	480x290x350	39
7	RMC32/210B	4	5.5	9.3	2850	280	81	9	480x290x350	42.5
8	RMC32/180A	5.5	7.5	14.1	2850	280	91	9	570x290x350	62

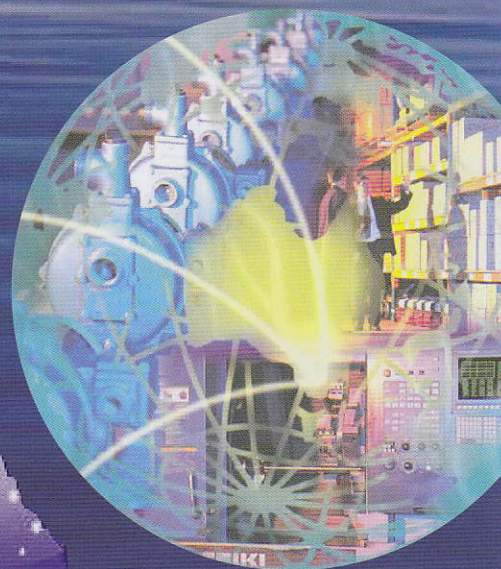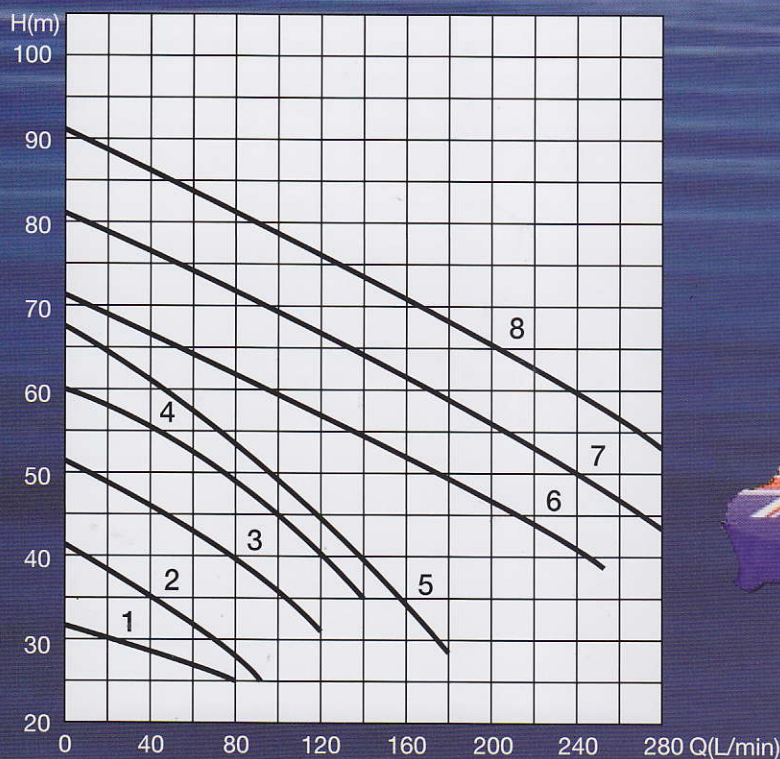

Reliable Choice

OVERAL DIMENSION

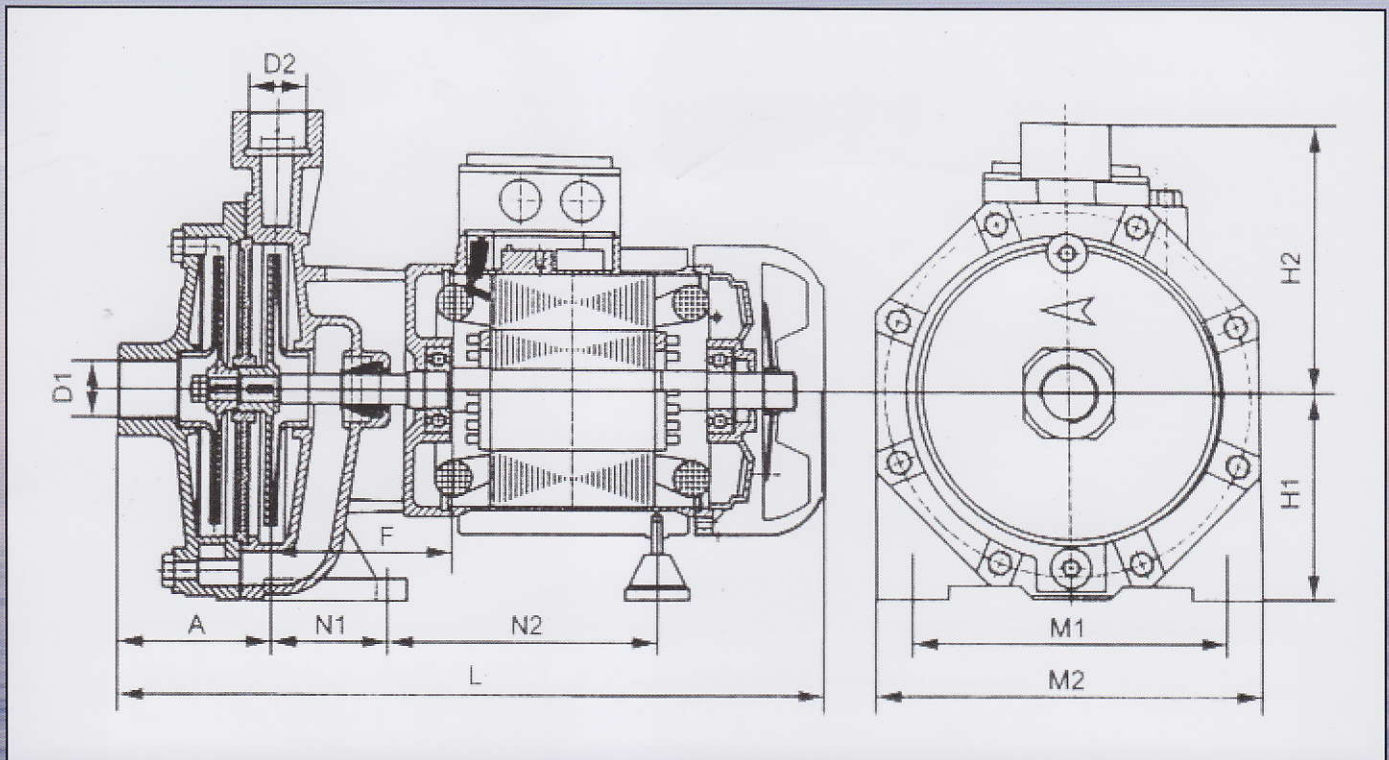

No.	Model	Motor Power		Overall Dimensions (mm)										
		kw	hp	D1	D2	A	F	L	N1	N2	M1	M2	H1	H2
1	RMC25/120	0.55	0.75	25	25	77.5	88.5	353	58.5	124	140	180	98.5	136
2	RMC25/130	0.75	1	25	25	77.5	88.5	353	58.5	124	140	180	98.5	136
3	RMC25/140H	1.1	1.5	32	25	84	96	392	60	147	175	215	115	153
4	RMC25/160B	1.5	2	32	25	84	96	392	60	147	175	215	115	153
5	RMC25/160A	2.2	3	40	32	90	111	448	72	120	185	230	125	160
6	RMC32/200C	3	4	40	32	96.5	143.5	534	85	196	210	260	140	170
7	RMC32/200B	4	5.5	40	32	96.5	143.5	534	85	196	210	260	140	170
8	RMC32/210B	5.5	7.5	50	40	102.5	140.5	587	100.5	202	220	275	150	185

Available From

Regent pumps
found since 1948

1-7 Redwood Drive
Dingley, Victoria 3172
Australia

Tel: +61 (0) 3 9551 5111

Fax: +61 (0) 3 9551 7217

Email: esales@regentpumps.com.au

www.regentpumps.com.au

All Specifications are subject to change with notice

Reliable Choice

